


Series CP450 - 4

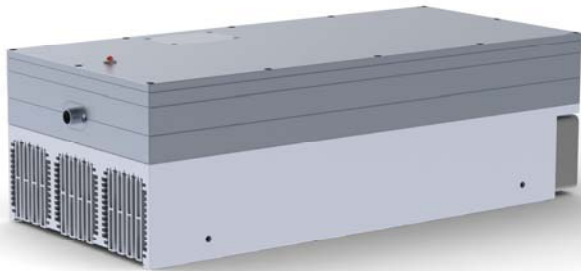

2 mJ 1064 nm
1 mJ 532 nm
0.5 mJ 355 nm

- high peak power Q-switched DPSS- laser
- 1064 nm - 532 nm and 355 nm available
- compact, air cooled laser for micro and precision processing
TEM₀₀ beam quality
- short pulses – **5ns** - with mJ pulse energy
- high reliability for 24/7 operation
- ports for TTL, analog and RS 232 control
- cost-effective operation

Applications

- rapid prototyping
- wavelength sensitive processing
- micro-machining
- marking, structuring, trimming
- glass engraving

Model	CP450-4-1064	CP450-4-532	CP450-4-355
Wavelength	1064 nm	532 nm	355 nm
Power	8 W @ 4000 Hz	4 W @ 4000 Hz	2 W @ 4000 Hz
Pulse Repetition Rate	Single shot ... 4000 Hz		
Pulse Width	8 ns @ 4000 Hz	5 ns @ 4000 Hz	5 ns @ 4000 Hz
Pulse Energy	2 mJ @ 4000 Hz	1 mJ @ 4000 Hz	0,5 mJ @ 4000 Hz
Beam Quality	M ² < 1,4		
Polarization	linear		
Dimension Laserhead (W/H/L)	188 mm × 129 mm × 410 mm		
Dimension Power Supply	19 Inch Rack, 4 HU		
Operating Temperature	15 ... 35 °C		
Operating Voltage	110 ... 240 V, 50 ... 60 Hz		