



Switch


AUTOMATED OPTICAL SWITCH

SPECIFICATION SHEET

AVAILABLE IN PXI


AVAILABLE IN MatriQ

Add optical switching capability to your test system with Quantifi Photonics' automated optical switches. The fast and reliable optical switch will enable automated sequential testing, saving time and streamlining your test procedures.




Bidirectional

Our optical switches are bidirectional; use it in N x M or M x N configurations for superior versatility.




Convenient park feature

The in-built park feature on applicable models provides the convenient functionality of an optical shutter.




High repeatability

High repeatability ensures that your measurements are reliable and consistent over time.




**High durability,
> 3 x 10⁷ cycles**

High switch lifecycle of 30 million operations ensures you get reliable hassle-free usage, for a long time.




**Wide coverage of
operational wavelengths**

One versatile tool to cover a wide variety of applications.




Low insertion loss

Maximise your power budget with the low insertion loss.




**Polarization maintaining
output**

On the polarization maintaining (PM) models, the slow axis of polarization is aligned with the output connector key as per industry standards. The user may choose to use polarization maintaining (PM) fiber or standard singlemode fiber (SMF)



**Supports single and
multi-mode applications**


Available in either single-mode or multi-mode fiber options for a seamless integration into your setup.



**Wide variety of port
configurations**

Choose the number of ports and switching configuration to suit your specific application.


CONFIGURATIONS

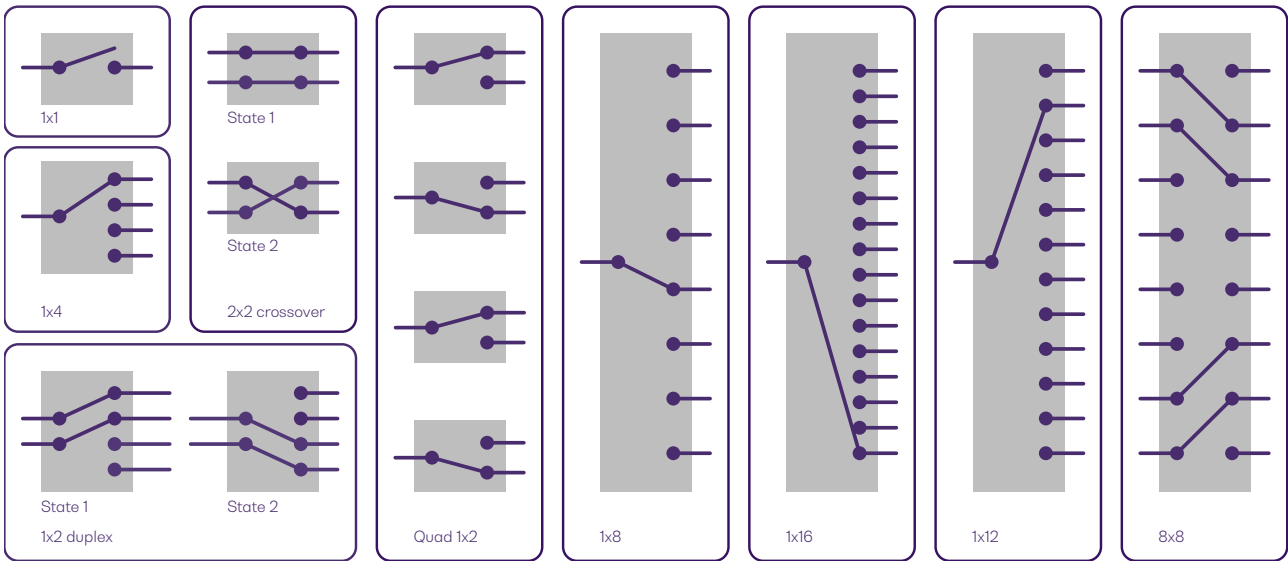

COHESION UI - GRAPHICAL USER INTERFACE

Simple, intuitive control with COHESIONUI™

COHESIONUI makes it simple to control our PXI or MatriQ instruments from a PC, tablet or smartphone. Its cutting-edge design offers a sleek modern interface, cross device compatibility, customizable views and remote network access.

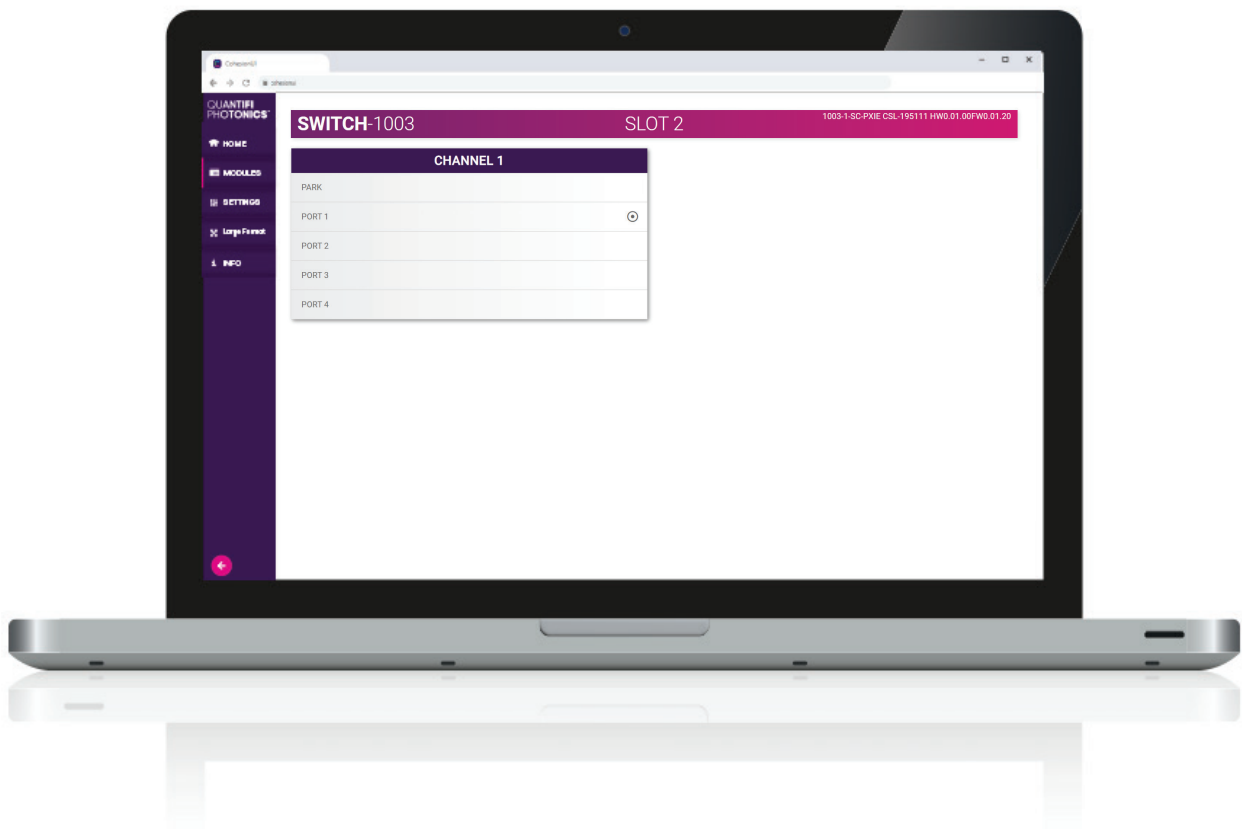

The Switch is highly customizable.

It comes with a wide range of switch configurations, fiber types and connectors. If you don't see what you need, please contact us to discuss your requirements.

Model number	Fiber type	Configuration	Connector	Wavelength	Slot count	Park state
1001	SMF-28	1 x 1	FC/PC, SC/PC, FC/APC, SC/APC	1260 to 1650 nm	1	No
1003	SMF-28	1 x 4	FC/PC, SC/PC, FC/APC, SC/APC	1260 to 1650 nm	1	Yes
1004	SMF-28	2 x 2 crossover	FC/PC, SC/PC, FC/APC, SC/APC	1260 to 1650 nm	1	No
1005	SMF-28	1 x 2 duplex	FC/PC, SC/PC, FC/APC, SC/APC	1260 to 1650 nm	2	No
1006	SMF-28	1 x 16	SC/PC and SC/APC	1260 to 1650 nm	2	Yes
1008	SMF-28	Quad 1 x 2	SC/PC and SC/APC	1260 to 1650 nm	2	Yes
1009	SMF-28	1 x 8	FC/PC, SC/PC, FC/APC, SC/APC	1260 to 1650 nm	2	Yes
1010	SMF-28	1 x 8 MT connector	FC/PC, SC/PC, FC/APC and SC/APC on common port; USCONEC Elite MT on 8 channel port	1260 to 1650 nm	1	Yes
1012	SMF-28	1 x 12 MT connector	FC/PC, SC/PC, FC/APC and SC/APC on Common PORT USCONEC Elite MT MALE APC on 12 channel port	1260 to 1650nm	1	Yes
1013	SMF-28	1 x 24 MT connector	FC/PC, SC/PC, FC/APC and SC/APC on Common PORT USCONEC Elite MT MALE APC on 24 channel port	1260 to 1650nm	1	No
1201	SMF-28	8 x 8 grid	FC/PC, SC/PC, FC/APC, SC/APC	1260 to 1650 nm	5	Yes
1202	SMF-28	16 x 16 GRID	FC/PC, SC/PC, FC/APC, SC/APC	1260 to 1650 nm	5	Yes
1101	50 μ core MMF OM3	1 x 1	FC/PC, SC/PC, FC/APC, SC/APC	800 to 1420 nm	1	No
1103	50 μ core MMF OM3	1 x 4	FC/PC, SC/PC, FC/APC, SC/APC	800 to 1420 nm	1	Yes
1104	50 μ core MMF OM3	2 x 2 crossover	FC/PC, SC/PC, FC/APC, SC/APC	800 to 1420 nm	1	No
1105	50 μ core MMF OM3	1 x 2 duplex	FC/PC, SC/PC, FC/APC, SC/APC	800 to 1420 nm	2	No
1106	50 μ core MMF OM3	1 x 16	SC/PC and SC/APC	800 to 1420 nm	2	Yes
1107	50 μ core MMF OM3	1 x 12 MT connector	FC/PC, SC/PC, FC/APC and SC/APC on Common PORT USCONEC Elite MT MALE APC on 12 channel port	800 to 1420 nm	1	Yes
1108	50 μ core MMF OM3	Quad 1 x 2	SC/PC and SC/APC	800 to 1420 nm	2	Yes
1403	62.5 μ core MMF OM1	1 x 4	FC/PC, SC/PC, FC/APC, SC/APC	800 to 1420 nm	1	Yes
1405	62.5 μ core MMF OM1	1 x 2 duplex	FC/PC, SC/PC, FC/APC, SC/APC	800 to 1420 nm	2	No
1406	62.5 μ core MMF OM1	1 x 16	SC/PC and SC/APC	800 to 1420 nm	2	Yes
1408	62.5 μ core MMF OM1	Quad 1 x 2	FC/PC, SC/PC, FC/APC, SC/APC	800 to 1420 nm	2	Yes
1409	62.5 μ core MMF OM1	1 x 8	FC/PC, SC/PC, FC/APC, SC/APC	800 to 1420 nm	2	Yes
1303	PM Panda 1550	1 x 4	FC/PC, SC/PC, FC/APC, SC/APC	1522 to 1570 nm	1	Yes
1304	PM Panda 1310	1 x 4	FC/PC, SC/PC, FC/APC, SC/APC	1290 to 1330 nm	1	Yes
1305	PM Panda 1310	2 x 2 crossover	FC/PC, SC/PC, FC/APC, SC/APC	1270 to 1350 nm	1	No
1306	PM Panda 1550	2 x 2 crossover	FC/PC, SC/PC, FC/APC, SC/APC	1510 to 1590 nm	1	No
1307	PM Panda 1310	1 x 16	SC/PC and SC/APC	1250 to 1350 nm	2	Yes


STANDARD SWITCH FRONT PANELS




Models: 1001, 1101




Models: 1003, 1103,
1303, 1304, 1403




Models: 1004, 1104,
1305, 1306

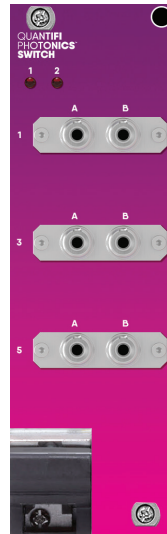

Models: 1005, 1105,
1405

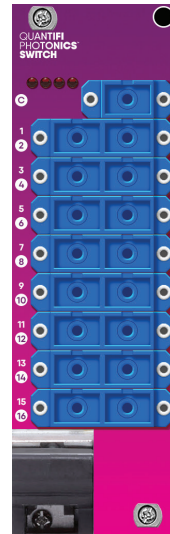


Models: 1006, 1106,
1406

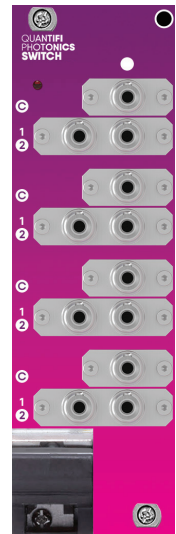


Models: 1008, 1108,
1408




Models: 1107




Models: 1010

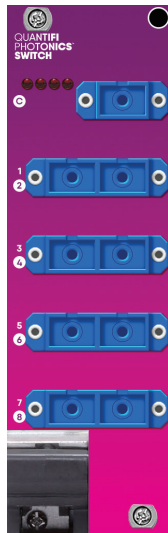


Models: 1409

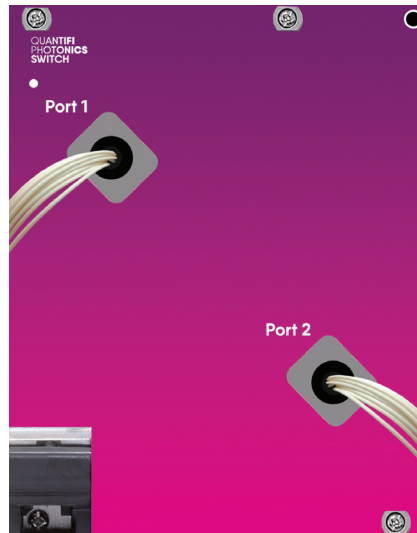

Models: 1201, 1202

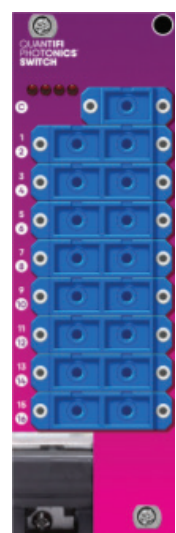

Models: 1307



Models: 1013

CHOOSE YOUR FORM FACTOR

PXIe – MODULAR

Our expanding range of PXIe optical test solutions are used by customers in mixed-signal test and measurement systems, reducing complexity, lowering the cost of test and accelerating time to market.

- Multi vendor, open standard with over 2500 PXI modules available
- Advanced timing and synchronization capabilities across instruments
- Low latency, high performance processing and fast data throughput
- Design and build scalable, high channel count systems
- Small footprint and lower power consumption



MATRIQ – COMPACT & PORTABLE

The MATRIQ series provides the same high-performance test capabilities of our PXIe modules in an compact benchtop design. MATRIQ instruments are simple to setup and easy to operate, making them the perfect choice for your optical lab or test bench.

- Same performance and control as our PXIe modules
- Plug and play with USB or Ethernet connectivity
- Control via the web-based GUI, COHESIONUI or SCPI commands
- Compact and portable design saves benchtop space




SWITCH TECHNICAL SPECIFICATIONS

PXI - MODULAR





SWITCH-1003-1-FC-PXIE

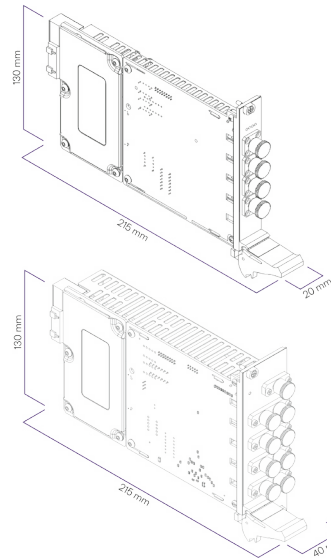

MATRIQ - COMPACT & PORTABLE



SWITCH-1003-1-FC-MTRQ

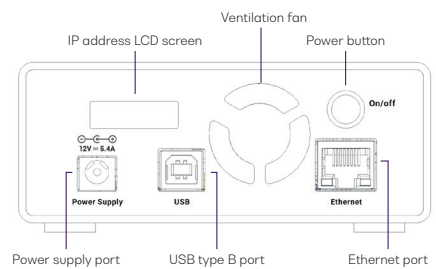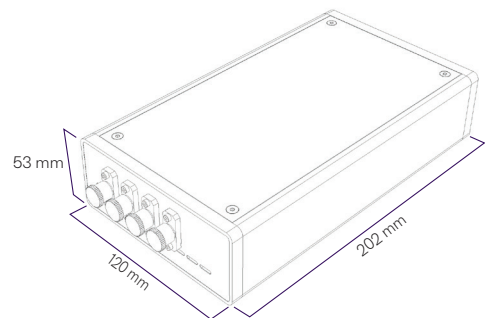

SWITCH TECHNICAL SPECIFICATIONS

General specifications	PXI	MATRIQ
Bus connection	PXIe	USB and Ethernet
Optical connectors	FC/PC, FC/APC, SC/PC, SC/APC (1006, 1106, 1106, 1108, 1111, 1112, 1307, 1406: SC/PC, SC/APC only) (1010, 1107: MT only)	
Slot count	1 slot: 1001, 1003, 1004, 1010, 1012, 1013, 1101, 1103, 1104, 1107, 1111, 1303, 1304, 1005, 1306, 1403 2 slots: 1005, 1006, 1008, 1009, 1105, 1106, 1108, 1112, 1307, 1405, 1406, 1409 5 slots: 1201, 1202	-
Dimensions (HxWxD)	130 mm x 20mm x 215 mm (5.1" x 0.8" x 8.5") 130 mm x 40mm x 215 mm (5.1" x 1.6" x 8.5") 130 mm x 100mm x 215 mm (5.1" x 4.0" x 8.5")	53 x 120 x 202 mm 2.1 x 4.7 x 8.0 inches
Weight	~ 1 kg ~2.2 lbs	~ 1.1 kg ~ 2.4 lbs
Operating temperature range	5 °C to 45 °C 41 °F to 113 °F	5 °C to 45 °C 41 °F to 113 °F
Storage temperature range	-40 °C to 70 °C -40 °F to 158 °F	-40 °C to 70 °C -40 °F to 158 °F

Power specifications	PXI	MATRIQ
AC input voltage range	Please refer to the latest PXI Express Hardware Specifications published by the PXI Systems Alliance.	90 to 264 VAC
AC input current		1.3 A (115 Vac), 0.9 A (230 Vac)
AC frequency range		47 to 63 Hz
DC output voltage		12 V
DC output current max		5.41 A
Dimensions (LxWxH)		4.58 x 2.06 x 1.23" (116.3 x 52.4 x 31.3 mm)

Single-Mode Fiber Optical Switches

1x1 optical switch	1001 ⁹ SMF-28			1001 ⁹ SMF-28		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm
Insertion loss ^{2,7}		0.5 dB	1.0 dB		0.5 dB	1.0 dB
Return loss ⁸		50 dB			50 dB	
Polarization dependent loss ²			< 0.1 dB			< 0.1 dB
Wavelength dependent loss			<0.3 dB			<0.3 dB
Crosstalk		-80 dB			-80 dB	
Repeatability ⁴			±0.1 dB			±0.1 dB
Damage level			+27 dBm			+27 dBm
Durability	3x10 ⁷ cycles			3x10 ⁷ cycles		

1x4 optical switch	1003 ⁹ SMF-28			1003 ⁹ SMF-28		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm
Insertion loss ^{2,7}		0.6 dB	0.8 dB		0.6 dB	0.8 dB
Return loss ⁸	50 dB			50 dB		
Polarization dependent loss ²			< 0.1 dB			< 0.1 dB
Wavelength dependent loss			0.2 dB			0.2 dB
Crosstalk			-50 dB			-50 dB
Repeatability ⁴			±0.02 dB			±0.02 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

SWITCH TECHNICAL SPECIFICATIONS

2x2 optical switch	1004 SMF-28			1004 SMF-28		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm
Insertion loss ²⁷		0.8 dB	1.0 dB		0.8 dB	1.0 dB
Return loss ⁸		55 dB			55 dB	
Polarization dependent loss ²			< 0.05 dB			< 0.05 dB
Wavelength dependent loss			< 0.25 dB			< 0.25 dB
Crosstalk		-55 dB			-55 dB	
Repeatability ⁴			±0.02 dB			±0.02 dB
Damage level			+27 dBm			+27 dBm
Durability	3x10 ⁷ cycles			3x10 ⁷ cycles		

1x2 duplex (2x4) optical switch	1005 ⁹ SMF-28			1005 ⁹ SMF-28		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm
Insertion loss ²⁷		0.5 dB	1.0 dB		0.5 dB	1.0 dB
Return loss ⁸		50 dB			50 dB	
Polarization dependent loss ²			< 0.1 dB			< 0.1 dB
Wavelength dependent loss			< 0.3 dB			< 0.3 dB
Crosstalk		-80 dB			-80 dB	
Repeatability ⁴			±0.1 dB			±0.1 dB
Damage level			+27 dBm			+27 dBm
Durability	3x10 ⁷ cycles			3x10 ⁷ cycles		

1x16 optical switch	1006 ⁹ SMF-28			1006 ⁹ SMF-28		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm
Insertion loss ²⁷		0.7 dB	1.0 dB		0.7 dB	1.0 dB
Return loss ⁸	50 dB			50 dB		
Polarization dependent loss ²			0.15 dB			0.15 dB
Wavelength dependent loss			0.30 dB			0.30 dB
Crosstalk			-50 dB			-50 dB
Repeatability ⁴			±0.05 dB			±0.05 dB
Damage level			+27 dBm			+27 dBm

SWITCH TECHNICAL SPECIFICATIONS

Quad (1x2) optical switch	1008 ⁹ SMF-28			1008 ⁹ SMF-28		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm
Insertion loss ²⁷		0.5 dB	0.8 dB		0.5 dB	0.8 dB
Return loss ⁸	50 dB			50 dB	55 dB	
Polarization dependent loss ²			< 0.1 dB			< 0.1 dB
Wavelength dependent loss			< 0.2 dB			< 0.2 dB
Crosstalk			-50 dB		-55 dB	-50 dB
Repeatability ⁴			±0.02 dB			±0.02 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

1x8 optical switch	1009 ⁹ SMF-28			1009 ⁹ SMF-28		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm
Insertion loss ²⁷		0.7 dB	1.0 dB		0.7 dB	1.0 dB
Return loss ⁸	50 dB			50 dB		
Polarization dependent loss ²			< 0.10 dB			< 0.10 dB
Wavelength dependent loss			< 0.20 dB			< 0.20 dB
Crosstalk			-50 dB			-50 dB
Repeatability ⁴			±0.05 dB			±0.05 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

1x8 optical switch (MT connector)	1010 SMF-28			1010 SMF-28		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm
Insertion loss ²⁷		0.9 dB	1.2 dB		0.9 dB	1.2 dB
Return loss ⁸	50 dB			50 dB		
Polarization dependent loss ²			< 0.10 dB			< 0.10 dB
Wavelength dependent loss			< 0.20 dB			< 0.20 dB
Crosstalk			-50 dB			-50 dB
Repeatability ⁴			±0.05 dB			±0.05 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

SWITCH TECHNICAL SPECIFICATIONS

1x12 switch (MT connector)	1012 SMF-28			1012 SMF-28		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm
Insertion loss ²⁷		0.9 dB	1.2 dB		0.5 dB	0.8 dB
Return loss ⁸	50 dB			50 dB	55 dB	
Polarization dependent loss ²			< 0.1 dB			< 0.1 dB
Wavelength dependent loss			< 0.2 dB			< 0.2 dB
Crosstalk			-50 dB		-55 dB	-50 dB
Repeatability ⁴			±0.05 dB			±0.02 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

1x24 switch (MT connector)	1013 SMF-28			1013 SMF-28		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm
Insertion loss ²⁷		0.7 dB	1.0 dB		0.7 dB	1.0 dB
Return loss ⁸	50 dB			50 dB	55 dB	
Polarization dependent loss ²			0.15 dB			< 0.1 dB
Wavelength dependent loss			0.3 dB			0.3 dB
Crosstalk			-50 dB		-55 dB	-50 dB
Repeatability ⁴			±0.05 dB			±0.02 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

8x8 grid optical switch	1201 ⁹ SMF-28			Not available in MATRIQ		
	Minimum	Typical	Maximum			
Wavelength range	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm			
Insertion loss ²⁷		0.8 dB	1.0 dB			
Return loss ⁸	45 dB					
Polarization dependent loss ²	< 0.4 dB	< 0.4 dB	< 0.4 dB			
Wavelength dependent loss	< 0.4 dB	< 0.4 dB	< 0.4 dB			
Crosstalk			-50 dB			
Repeatability ⁴			±0.03 dB			
Damage level			+27 dBm			
Durability	1x10 ⁹ cycles					

SWITCH TECHNICAL SPECIFICATIONS

16x16 grid optical switch	1202 ⁹ SMF-28			Not available in MATRIQ
	Minimum	Typical	Maximum	
Wavelength range	1260 to 1650 nm	1260 to 1650 nm	1260 to 1650 nm	
Insertion loss ²⁷		0.8 dB	1.0 dB	
Return loss ⁸	45 dB			
Polarization dependent loss ²	< 0.4 dB	< 0.4 dB	< 0.4 dB	
Wavelength dependent loss	< 0.4 dB	< 0.4 dB	< 0.4 dB	
Crosstalk			-50 dB	
Repeatability ⁴			±0.03 dB	
Damage level			+27 dBm	
Durability	1x10 ⁹ cycles			

Multi-mode fiber optical switches

1x1 optical switch	1101 ⁹ 50 µm Core MMF OM3			1101 ⁹ 50 µm Core MMF OM3		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm
Insertion loss ^{2,7}		0.3 dB	0.6 dB		0.3 dB	0.6 dB
Return loss ⁸		TBD			TBD	
Polarization dependent loss ²		TBD			TBD	
Wavelength dependent loss		TBD			TBD	
Crosstalk		-80 dB			-80 dB	
Repeatability ⁴			±0.1 dB			±0.1 dB
Damage level			+27 dBm			+27 dBm
Durability	3x10 ⁷ cycles			3x10 ⁷ cycles		

1x4 optical switch	1103 ⁹ 50 µm Core MMF OM3			1103 ⁹ 50 µm Core MMF OM3		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm
Insertion loss ^{2,6,7}		0.8 dB ⁶	1.2 dB ⁶		0.8 dB ⁶	1.2 dB ⁶
Return loss ⁸	20 dB			20 dB		
Polarization dependent loss ²		TBD			TBD	
Wavelength dependent loss		TBD			TBD	
Crosstalk		-25 dB			-25 dB	
Repeatability ⁴			±0.02 dB			±0.02 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

2x2 optical switch	1104 ⁹ 50 µm Core MMF OM3			1104 ⁹ 50 µm Core MMF OM3		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm
Insertion loss ^{2,5,7}		0.8 dB ⁵	1.0 dB ⁵		0.8 dB ⁵	1.0 dB ⁵
Return loss ⁸		TBD			TBD	
Polarization dependent loss ²		TBD			TBD	
Wavelength dependent loss		TBD			TBD	
Crosstalk		-50 dB			-50 dB	
Repeatability ⁴			±0.02dB			±0.02dB
Damage level			+27 dBm			+27 dBm
Durability	3x10 ⁷ cycles			3x10 ⁷ cycles		

SWITCH TECHNICAL SPECIFICATIONS

1x2 duplex (2x4) optical switch	1105 ⁹ 50 μm Core MMF OM3			1105 ⁹ 50 μm Core MMF OM3		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm
Insertion loss ^{2,5,7}		0.3 dB ⁵	0.6 dB ⁵		0.3 dB ⁵	0.6 dB ⁵
Return loss ⁸		TBD			TBD	
Polarization dependent loss ²		TBD			TBD	
Wavelength dependent loss		TBD			TBD	
Crosstalk		-80 dB			-80 dB	
Repeatability ⁴			±0.1 dB			±0.1 dB
Damage level			+27 dBm			+27 dBm
Durability	3x10 ⁷ cycles			3x10 ⁷ cycles		

1x16 optical switch	1106 50 μm Core MMF OM3			1106 50 μm Core MMF OM3		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm
Insertion loss ^{2,5,7}			1.6 dB ⁵			1.6 dB ⁵
Return loss ⁸	20 dB			20 dB		
Polarization dependent loss ²		TBD			TBD	
Wavelength dependent loss		TBD			TBD	
Crosstalk			-25 dB			-25 dB
Repeatability ⁴			±0.04 dB			±0.04 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

1x12 optical switch (MT connector)	1107 50 μm Core MMF OM3			1107 50 μm Core MMF OM3		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm
Insertion loss ^{2,5,7}			1.7 dB ⁵			1.7 dB ⁵
Return loss ⁸	20 dB			20 dB		
Polarization dependent loss ²		TBD			TBD	
Wavelength dependent loss		TBD			TBD	
Crosstalk			-25 dB			-25 dB
Repeatability ⁴			±0.04 dB			±0.04 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

SWITCH TECHNICAL SPECIFICATIONS

Quad (1x2) optical switch	1108 ⁹ 50 μm Core MMF OM3			1108 ⁹ 50 μm Core MMF OM3		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm
Insertion loss ^{2,7}		0.9 dB ⁵	1.1 dB ⁵		0.9 dB ⁵	1.1 dB ⁵
Return loss ⁸	20 dB			20 dB		
Polarization dependent loss ²		TBD			TBD	
Wavelength dependent loss		TBD			TBD	
Crosstalk			-25 dB			-25 dB
Repeatability ⁴			±0.02 dB			±0.02 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

1x4 optical switch	1403 ⁹ 62.5μ Core MMF OM1			1403 ⁹ 62.5μ Core MMF OM1		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm
Insertion loss ^{2,7}		0.8 dB ⁶	1.2 dB ⁶		0.8 dB ⁶	1.2 dB ⁶
Return loss ⁸	20 dB			20 dB		
Polarization dependent loss ²		TBD			TBD	
Wavelength dependent loss		TBD			TBD	
Crosstalk			-20 dB			-20 dB
Repeatability ⁴			±0.2 dB			±0.2 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

1x2 (2x4) optical switch	1405 ⁹ 62.5μ Core MMF OM1			1405 ⁹ 62.5μ Core MMF OM1		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm
Insertion loss ^{2,5,7}		0.3 dB ⁵	0.6 dB ⁵		0.3 dB ⁵	0.6 dB ⁵
Return loss ⁸		TBD			TBD	
Polarization dependent loss ²		TBD			TBD	
Wavelength dependent loss		TBD			TBD	
Crosstalk		-80 dB			-80 dB	
Repeatability ⁴			±0.1 dB			±0.1 dB
Damage level			+27 dBm			+27 dBm
Durability	3x10 ⁷ cycles			3x10 ⁷ cycles		

SWITCH TECHNICAL SPECIFICATIONS

1x16 optical switch	1406 ⁹ 62.5 μ Core MMF OM1			1406 ⁹ 62.5 μ Core MMF OM1		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm
Insertion loss ^{2,5,7}			1.6 dB ⁵			1.6 dB ⁵
Return loss ⁸	20 dB			20 dB		
Polarization dependent loss ²		TBD			TBD	
Wavelength dependent loss		< 0.25 dB			< 0.25 dB	
Crosstalk			-25 dB			-25 dB
Repeatability ⁴			\pm 0.04 dB			\pm 0.04 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

Quad 1x2 switch	1408 62.5 μ Core MMF OM1			1408 62.5 μ Core MMF OM1		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm
Insertion loss ^{2,5,7}		0.9 dB	1.1 dB ⁵		0.9 dB	1.1 dB ⁵
Return loss ⁸	20 dB			20 dB		
Polarization dependent loss ²		TBD			TBD	
Wavelength dependent loss		TBD			TBD	
Crosstalk			-25 dB			-25 dB
Repeatability ⁴			\pm 0.02 dB			\pm 0.02 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

1x8 optical switch	1409 62.5 μ Core MMF OM1			1409 62.5 μ Core MMF OM1		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm	800 to 1420 nm
Insertion loss ^{2,5,7}		1.0 dB	1.4 dB ⁵		1.0 dB	1.4 dB ⁵
Return loss ⁸	20 dB			20 dB		
Polarization dependent loss ²		TBD			TBD	
Wavelength dependent loss		TBD			TBD	
Crosstalk			-20 dB			-20 dB
Repeatability ⁴			\pm 0.02 dB			\pm 0.02 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

SWITCH TECHNICAL SPECIFICATIONS

Polarization maintaining optical fiber switches

1x4 PM optical switch (1550 nm)	1303 ⁹ PM Panda 1550			1303 ⁹ PM Panda 1550		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1520 to 1570 nm	1520 to 1570 nm	1520 to 1570 nm	1520 to 1570 nm	1520 to 1570 nm	1520 to 1570 nm
Insertion loss ^{2,7}			1.5 dB			1.5 dB
Return loss ⁸	50 dB			50 dB		
Wavelength dependent loss			0.25 dB			0.25 dB
Crosstalk			-50 dB			-50 dB
Repeatability ⁴			±0.05 dB			±0.05 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

1x4 PM optical switch (1310 nm)	1304 ⁹ PM Panda 1310			1304 ⁹ PM Panda 1310		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1290 to 1330 nm	1290 to 1330 nm	1290 to 1330 nm	1290 to 1330 nm	1290 to 1330 nm	1290 to 1330 nm
Insertion loss ^{2,7}			1.5 dB			1.5 dB
Return loss ⁸	50 dB			50 dB		
Wavelength dependent loss			0.25 dB			0.25 dB
Crosstalk			-50 dB			-50 dB
Repeatability ⁴			±0.05 dB			±0.05 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		

2x2 crossover PM optical switch (1310 nm)	1305 ⁹ PM Panda 1310			1305 ⁹ PM Panda 1310		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1270 to 1350 nm	1270 to 1350 nm	1270 to 1350 nm	1270 to 1350 nm	1270 to 1350 nm	1270 to 1350 nm
Insertion loss ^{2,5,7}		1.5 dB	1.8 dB		1.5 dB	1.8 dB
Return loss ⁸		55 dB			55 dB	
Wavelength dependent loss		< 0.2 dB			< 0.2 dB	
Crosstalk		-60 dB			-60 dB	
Repeatability ⁴			±0.02 dB			±0.02 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁷ cycles			1x10 ⁷ cycles		
PER	> 18 dB (20 dB typical)			> 18 dB (20 dB typical)		

SWITCH TECHNICAL SPECIFICATIONS


2x2 crossover PM optical switch (1550 nm)	1306° PM Panda 1550			1306° PM Panda 1550		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1510 to 1590 nm	1510 to 1590 nm	1510 to 1590 nm	1510 to 1590 nm	1510 to 1590 nm	1510 to 1590 nm
Insertion loss ^{2,7}		0.8 dB	1.2 dB		0.8 dB	1.2 dB
Return loss ⁸		55 dB			55 dB	
Wavelength dependent loss		< 0.2 dB			< 0.2 dB	
Crosstalk		-60 dB			-60 dB	
Repeatability ⁴			±0.02 dB			±0.02 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		
PER	> 18 dB (20 dB typical)			> 18 dB (20 dB typical)		

1x16 switch	1307° PM Panda 1310			1307° PM Panda 1310		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
Wavelength range	1250 to 1350 nm	1250 to 1350 nm	1250 to 1350 nm	1250 to 1350 nm	1250 to 1350 nm	1250 to 1350 nm
Insertion loss ^{2,7}			1.5 dB			1.5 dB
Return loss ⁸	50 dB			50 dB		
Wavelength dependent loss		<0.3 dB +/- 20 nm			<0.3 dB +/- 20 nm	
Crosstalk			-50 dB			-50 dB
Repeatability ⁴			± 0.04 dB			± 0.04 dB
Damage level			+27 dBm			+27 dBm
Durability	1x10 ⁹ cycles			1x10 ⁹ cycles		
PER	15 dB			15 dB		

Notes

1. Specifications are valid at 23 °C ± 3 °C
2. Excluding connectors. Add 0.2 dB for SMF (0.1 dB for MMF) per connector
3. Power off isolation is same as crosstalk
4. Repeatability is defined after 100 cycles
5. IL is measured at 850 and 1310 nm, 23°
6. IL is measured at 850 and 1270-1411 nm, 23°
7. IL is for single-band. Dual-band option adds 0.3 dB
8. With FC/APC connectors
9. Preliminary specs
10. Multimode products are tested and calibrated using mode-conditioning setups defined in TIA EIA-455-43 FOTP-43 for Output Near-Field Radiation Patterns.

SWITCH - XXXX - X - XX - PXIE
 SWITCH - XXXX - X - XX - MTRQ

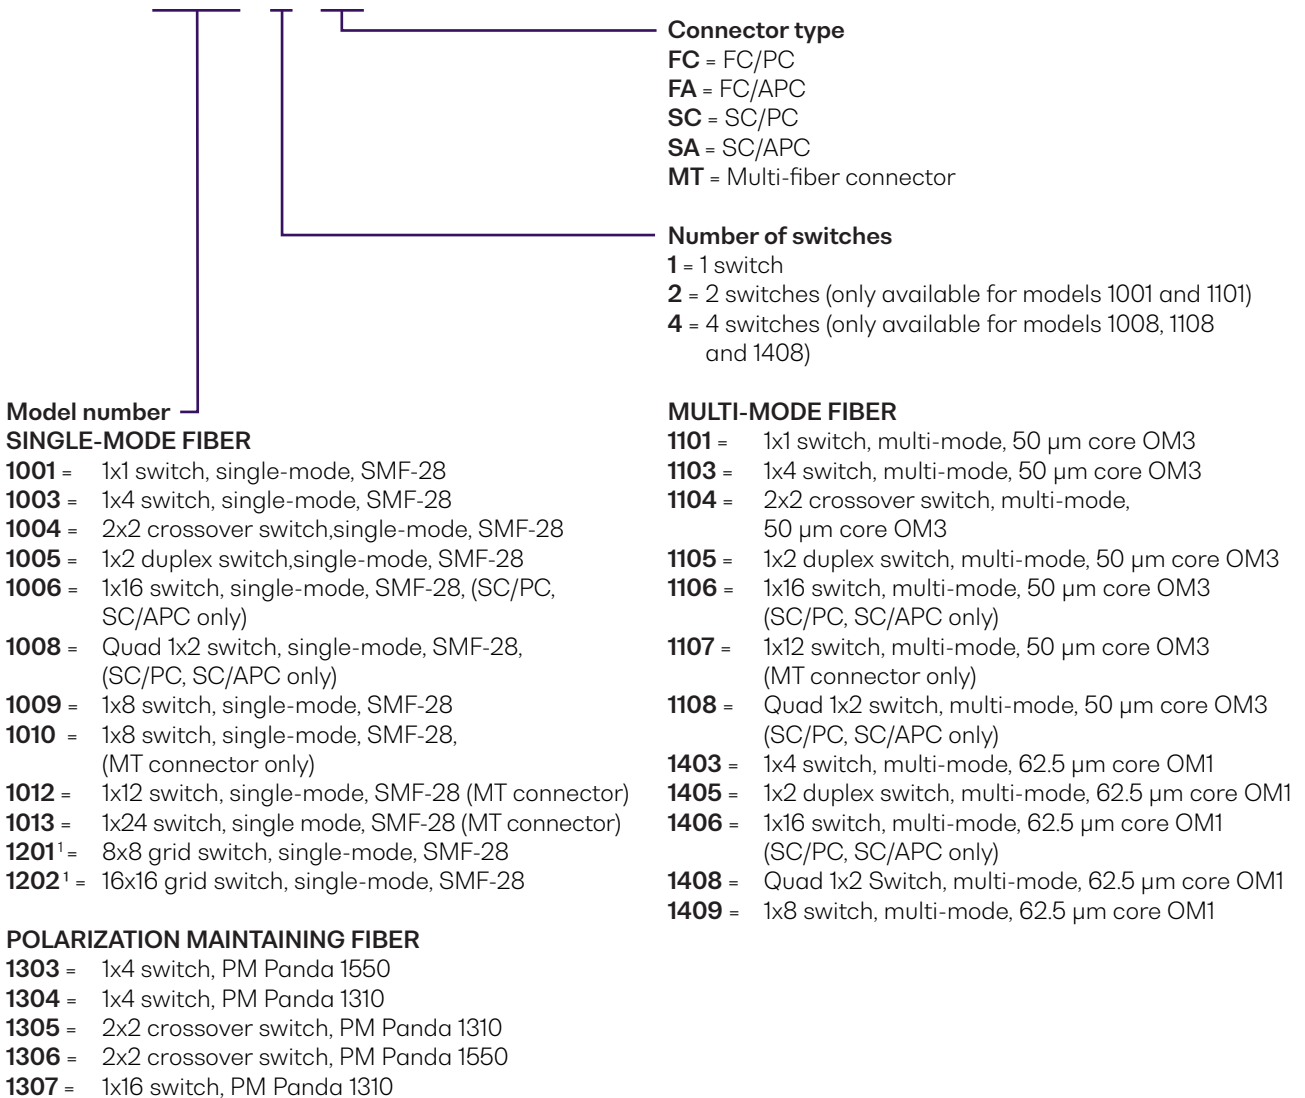

1. This model is not available in MatriQ

This product comes with a standard 1 year warranty.

EXTENDED WARRANTIES AND CALIBRATION PLANS

With an **extended warranty and calibration plan** you'll spend more time focused on your priorities and less time worrying about maintenance.

Your choice: add a **3 or 5 year extended warranty** when you buy.



Guarantee performance

Ensure your equipment is operating at the best it can be for reliable and accurate results.

Lower cost of ownership

Lock in savings and maximise your testing budget with a lower base cost of ownership.

Peace of mind

Spend less time worrying about maintenance and more on generating results.

CALIBRATION PLANS FOR ADDITIONAL DISCOUNTS

Order a **calibration plan** when purchasing your Quantifi Photonics instruments and get additional discounts.

10% Discount

On calibrations ordered at the time of purchase.

25% Discount

Add on an extended warranty and receive a 25% discount on calibrations.

Over time and with regular use, all optical parts and connectors require re-calibration and maintenance to guarantee accurate and reliable performance. We recommend Quantifi Photonics optical instruments are re-calibrated every 12 months. With an instrument calibration performed by Quantifi Photonics technicians you receive:

- Comprehensive calibration to factory specifications
- End-to-end inspection to ensure all instrument functions are working and connectors are clean
- Firmware, software and documentation updates
- Certificate of calibration which includes detailed test results

How to do I secure my extended warranty or calibration plan?

Contact your Quantifi Photonics sales representative or email sales@quantifiphotonics.com

Extended warranties and calibration plans must be ordered at the time of purchase and are available only for Quantifi Photonics' products. The 25% calibration discount only applies to calibrations while the product is covered by the extended warranty period.

Our portfolio of optical & electro-optical test modules is rapidly expanding to meet a wide range of customer requirements and applications.

Tunable Laser Sources

Versatile telecom laser sources with full tunability across C or L bands. Narrow 100 kHz linewidth, up to 16.5 dBm of power, optional whisper mode to disable frequency dither.



Fixed Wavelength Laser Sources

Highly customizable DFB or FP laser sources available in a wide range of wavelengths and powers. Models support SMF, MMF and PMF.



Swept, Tunable Continuous Wave Laser

Swept, tunable continuous wave (CW) laser source with 0.01 dB power stability and 400 nm/s high-speed scan rate for R&D and production testing.



Superluminescent Diode Broadband Light Source

Super-luminescent LED light source with high output power, large bandwidth and low spectral ripple and various wavelengths.



Erbium-Doped Fiber Amplifier (EDFA)

High power Erbium-Doped Fiber Amplifier for signal power amplification in C and L bands with various control modes, including automatic gain control.



Variable Optical Attenuator (VOA)

Fast attenuation speed with low insertion loss and built-in power monitoring. Operates in fixed attenuation or constant output power modes. Models support SMF, MMF and PMF connector types.



Polarization Controller & Scrambler

High-speed automated polarization control with broad wavelength coverage from 1260nm to 1650nm, low insertion loss and back reflection. Full remote control via intuitive GUI, LabVIEW or SCPI.



Optical-to-Electrical Converter

High bandwidth, broadband O-to-E converter. Available in a range of configurations; choose from 1 or 2 channels, AC or DC coupling and various conversion gain and operating wavelength ranges.



Optical Switch

Proven reliability and fast switching time. Wide variety of switch configurations: 1x4, 1x16, 16x16 and more. Models support SMF, MMF and PMF.



Optical Spectrum Analyzer (OSA)

Low cost, spectral measurement in a compact module with built-in analysis for: SMSR, OSNR & spectral width. Targeted wavelengths for specific applications in O band, C band & L band.



Optical Power Meters

Fast terminating or inline monitoring of optical signal power from -60 to +10 dBm across 750 - 1700 nm wavelengths. Model with logarithmic analog output for applications such as silicon photonics fiber alignment.



Bit Error Rate Tester (BERT)

2, 4 or 8-channel Pulse Pattern Generator and Error Detector at rates up to 29 Gbps for the design, characterization and production of optical transceivers and opto-electrical components.



Photonic Doppler Velocimeter (PDV)

Purpose-built module for Photonic Doppler Velocimetry (PDV). A circulator, two VOAs and a passive coupler all built into one compact module.



Passive Component Integration

Integrate passive optical components of your choice such as WDM couplers, splitters, band-pass filters, PM beam splitters and circulators. Models support SMF, MMF and PMF.



Passive Component Storage

Protect and store your own passive fiber optic components such as splitters, connector adaptor patchcords, WDM couplers, and isolators in one handy module.



PXI - MODULAR SYSTEM

MATRIQ - COMPACT BENCHTOP

See our website for more details
[quantifiphotonics.com/products](https://www.quantifiphotonics.com/products)

Test. Measure. Solve.TM

Quantifi Photonics is transforming the world of photonics test and measurement. Our portfolio of optical and electrical test instruments is rapidly expanding to meet the needs of engineers and scientists around the globe. From enabling ground-breaking experiments to driving highly efficient production testing, you'll find us working with customers to solve complex problems with experience and innovation.

To find out more, get in touch with us today.

General Enquiries	sales@quantifiphotonics.com
Technical Support	support@quantifiphotonics.com
Phone	+64 9 478 4849
North America	+1-800-803-8872



[quantifiphotonics.com](https://www.quantifiphotonics.com)

**QUANTIFI
PHOTONICS®**